


Product Data Sheet - Pictogram RM

2022 V1

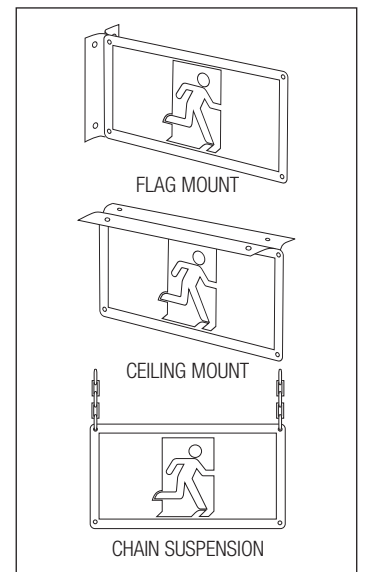

Ecoglo "Pictogram" S20 Signs are designed to be used in and about buildings to identify escape routes for compliance with performance based building codes. The signs will be clearly visible and readily understandable under all conditions of foreseeable use, including emergency conditions.

SIGN DEFINITION

Exit straight on from here.

COMPLIANCE

Ecoglo S20 signs have been independently tested in accordance with UL924 for use in Performance Solutions to meet the performance requirements of building codes such as NFPA 101 Life Safety Code, International Fire Code (IFC), Building Code of Australia (BCA), and any other performance based building codes.

PERFORMANCE

30 Minutes Visibility Facilities

Minimum charging illuminance of 55 lux for 10 minutes will ensure minimum luminance of 30 mcd for 30 minutes after failure of the main lighting.

90 Minutes Visibility Facilities

Minimum charging illuminance of 200 lux for 10 minutes will ensure minimum luminance of 30 mcd for 90 minutes after failure of the main lighting.

120 Minutes Visibility Facilities

Minimum charging illuminance of 300 lux for 10 minutes will ensure minimum luminance of 30 mcd for 120 minutes after failure of the main lighting.

Daily exposure to daylight will substantially reduce the minimum charging requirements specified above.

Operating Temperature Range: -20°C to +40°C*

* For controlled environment (constant temperature) rooms below 0°C contact Ecoglo.

UV Resistance - Loss of luminance after 1000 hrs ASTM G-155 Cycle 1 exposure: <10%

Salt Spray Resistance – ASTM B117: Pass

Washability – ASTM D4828: Pass

Rate of Burning – ASTM D635: Pass

Surface Flammability - ASTM E162: Pass

Toxicity - Bombardier Toxic Gas Generation Test SMP800-C: Pass

Radioactivity - ASTM D3648: Pass

High Temperature Curing: Pass

SUPPLY

The product is available in 2 sizes - maximum viewing distance 16 metres and maximum viewing distance 24 metres.

| PRODUCT CODE | PRODUCT NAME | SIGN DEFINITION | SIGN SIZE | MAXIMUM VIEWING DISTANCE |
|----------------|--------------|----------------------------|---------------|--------------------------|
| S20-RM2916-16m | Pictogram | Exit straight on from here | 290mm x 162mm | 16 metres |
| S20-RM4223-24m | Pictogram | Exit straight on from here | 420mm x 230mm | 24 metres |

COMPOSITION

The high visibility flat panel is manufactured from 5005 0.9mm aluminium sheet. Custom made photoluminescent pigments are embedded in thermoset polyester carriers to integrally bond the active ingredients onto the aluminium sheet following curing at high temperature.



INSTALLATION

The standard sign is supplied with fixers for mounting flat on a wall.

Signs with brackets for ceiling or flag mounting are available - see order codes for signs and brackets below.

| PRODUCT CODE | PRODUCT NAME | CEILING MOUNT BRACKET | FLAG MOUNT BRACKET |
|----------------|--------------|-----------------------|--------------------|
| S20-RM2916-16m | Pictogram | BR1-290 | BR1-162 |
| S20-RM4223-24m | Pictogram | BR1-420 | BR1-230 |

Chain suspension is also available.

Contact

Ecoglo International Limited

Email: info@ecoglo.com **Web:** www.ecoglo.com